



**Park  
Thermal  
International (1996) Corporation**

62 Todd Road, Georgetown, Ontario L7G 4R7

Tel: (905) 877-5254 Fax: (905) 877-6205

Toll Free: (877) 834-4328

Email: [jmistry@parkthermal.com](mailto:jmistry@parkthermal.com)

[www.parkthermal.com](http://www.parkthermal.com)

**Equipment Description**

**Item # 4608**

**Manufacturer:** REX POWER MAGNETICS

**Type:** TRANSFORMER

**Serial Number:** L 12

**Cat. No.:** BA30J-P/Z

**Rating:** 30 KVA, 60 HZ, 3 PH ISO

**Encl:** TYPE 3R

**Primary Voltage:** 600 DELTA

**Secondary Voltage:** 480Y/277

**Weight:** 290 LBS

NOTE: equipment is sold "AS IS, WHERE IS" and buyer shall indemnify seller against and hold seller harmless from any and all claims, actions and damages arising out of the possession, operation, condition or use of the equipment.

Seller suggests that you contact the manufacture for important information pertaining to safety and proper use and operation of the above equipment. For safety reasons, we request that you do not place the equipment into service until you have received current safety instructions from the manufacturer.







Rex Manufacturing 


**Cat #** BA30J-P/Z  
**KVA** 30 000  
**PRI.** 600  
**SEC.** 480/277  
**S/#** 12L20114



|  |                      |                         |
|--|----------------------|-------------------------|
|  <b>REX POWER MAGNETICS</b>  |                      |                         |
| DIVISION OF TRANSFACTOR INDUSTRIES INC.  |                      |                         |
| CONCORD, ONT.  |                      | LR34483 Energy Verified |
| CAT. NO.   | <b>BA30J-P/Z</b>     | KVA 30 ENCL TYPE-3R     |
| SERIAL NO  | L 12                 | HZ 60 TYPE ANN          |
| TRANSFORMER  | 3 PH. ISO.           | % IMP 5.5 AT 170 C.     |
| INSULATION CLASS   | 220 C.               | TEMPERATURE RISE 150.C. |
| PRI. VOLTAGE   | 600 DELTA H1-H2-H3   | BIL 10 KV.              |
| SEC. VOLTAGE   | 480Y/277 X0-X1-X2-X3 | WT. 290 LBS.            |

| PRI. VOLTAGE | CONNECTION CONNEXION |
|--------------|----------------------|
| 105.0%       | 1-1-1                |
| 102.5%       | 2-2-2                |
| 100.0%       | 3-3-3                |
| 97.5%        | 4-4-4                |
| 95.0%        | 5-5-5                |

(L 12)

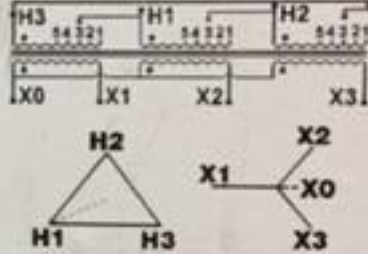SPRINKLERPROOF WHEN THE ANGLE BETWEEN SPRINKLER HEADS AND OPENINGS IN THE ENCLOSURE DOES NOT EXCEED 45° FROM THE VERTICAL

A L'ÉPREUVE DES INFILTRATIONS D'EAU LORSQUE L'ANGLE ENTRE LES GICLERS ET LES OUVERTURES DU BOITIER N'EST PAS SUPÉRIEUR À 45° PAR RAPPORT À LA VERTICALE

WEATHER RESISTENT TYPE 3R RATED ENCLOSURE FOR ADDITIONAL OUTDOOR WEATHER PROTECTION

INSTALLATION OF OPTIONAL WEATHER SHIELD KIT WPS IS RECOMMENDED

**CU-AL**